

# Flow Iron Plug Valves

Reliable isolation valves for well service applications

 **Working pressure:**  
up to 15,000 psi [103 MPa]

 **Sizes:**  
2 or 3 in

## Applications

Hydraulic fracturing, cementing, well testing, and flowback


## How it improves wells

Flow iron plug valves from Cameron deliver maximum total lifecycle cost savings, even in the oil and gas industry's most demanding applications. For all of your flow iron requirements, from high-stage-count hydraulic fracturing to cementing, well testing, and even abrasive flowback, you can count on Cameron for high reliability and low cost.

## Additional information

Cameron offers ultimate sealability in standard 2- and 3-in sizes with standard 1502 hammer wing unions or Grayloc® connections.

Valves are available for use in sour gas applications and with optional bar caps, gear operators, or hydraulic actuators.

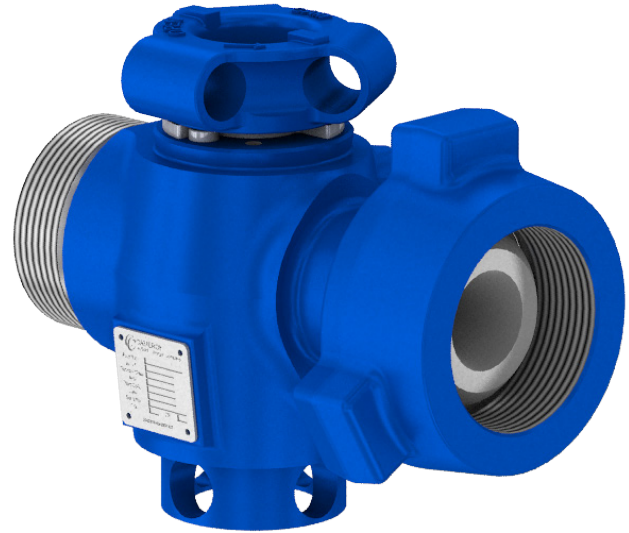

*Cameron 2-in × 2-in flow iron plug valve.*

### Flow Iron Plug Valve Specifications

Size, in	Hammer Union	Sour Gas Application	Bore Diameter, in	Length, in	Working Pressure, psi
2 × 1	1502	No	0.88	10.56	15,000
2 × 1	1502	Yes	0.88	10.56	10,000
2 × 2	1502	No	1.88	13.88	15,000
2 × 2	1502	Yes	1.88	13.88	10,000
3 × 3	Grayloc	No	2.75	20.75	15,000
3 × 3	1502	No	2.75	15.69	15,000

All specifications are subject to change without notice.  
Additional configurations available upon request.